

EVERLAST® ELEVATE

Residential Electric Water Heaters



Benefits

- **DYNAMIC CAPACITY** – Design optimized to provide up to the same amount of hot water as a 100 gallon conventional electric water heater, from a 55 gallon tank.
- **MAXIMUM DURABILITY** – Constructed of high-quality stainless steel, using low-watt density titanium elements, backed by an industry leading Lifetime Limited Warranty.*
- **SIMPLE INSTALLATION** – Lightweight and easier to handle than glass-lined water heaters, making new or retrofit installations a breeze by seamlessly fitting into the footprint of an 80 gallon unit.
- **OUT OF THE BOX COMPLIANCE** with jurisdictions requiring installation of a thermostatic mixing valve.

Features

- **MAXIMUM SAFETY WITH INTEGRATED SCALD PROTECTION** – Built-in ASSE 1017/ ASSE 1070 certified mixing valve ensures heated water is delivered at a consistent, safe temperature.
- **FULLY AUTOMATIC SURFACE MOUNTED THERMOSTATS** for controlling the temperature, combined with a manual energy cut-off to prevent overheating.
- **TEMPERATURE AND PRESSURE RELIEF VALVE** – Factory installed.
- **FULL PORT BRASS DRAIN VALVE** – Factory installed for fast and easy draining.

Performance

- **UEF RATING OF 0.94**
- **UP TO 115 GAL OF 105 °F AT THE FIXTURE WHEN TANK IS SET TO 170 °F**
- **240 VOLTS, 5500-WATT INPUT**
- **MEETS ALL EFFICIENCY REQUIREMENTS OF THE DOE**
- **NAECA III COMPLIANT**

Quality

- **316L STAINLESS STEEL TANK**
- **ALUMINUM ANODE ROD FOR ADDITIONAL PROTECTION**
- **LIMITED LIFETIME WARRANTY* / 6 YEAR COMPONENTS***



Globally Recognized. Industry Respected.

*With online registration. See product warranty for details.



SCAN HERE!

For more info about the
EVERLAST® ELEVATE




SPECIFICATIONS AND APPLICATION DATA



MODELS	SAFETY LISTING	# OF ELEMENTS & THERMOSTATS	WATTAGE (W)	VOLTAGE (V)	FULL LOAD CURRENT IN AMPS (SINGLE PHASE)	AHRI CERTIFIED RATINGS			RECOVERY @ 90 °F RISE (GAL.)	WATER TEMPERATURE RATINGS					SHIPPING WEIGHT
						FIRST HOUR BIN	FIRST HOUR RATING (GAL.)	UEF		FROM MIXING VALVE		FROM THERMOSTAT			
										MIN DELIVERY TEMP	MAX DELIVERY TEMP	MIN DELIVERY TEMP	MAX DELIVERY TEMP	HIGH TEMP LIMIT	
ELV055C2X055N	UL 174	2	5500	240	23	High	77	0.94	24	90 °F 32 °C	130 °F 54.4 °C	125 °F 51.7 °C	170 °F 76.7 °C	190 °F 87.8 °C	150 lbs. 68 kg

SPECIFICATIONS AND DIMENSIONS

MODELS	GAL.	DRAIN HEIGHT (IN)	T&P HEIGHT (IN)	TOP OF HEATER (IN)	OVERALL HEIGHT (IN)	DIAMETER (IN)	WATER CONNECTION DISTANCE (IN)	HOT/COLD PORTS
		A	B	C	D	E	F	
ELV055C2X055N	55	6 ¾	41 ¾	51	58	23 ¾	8	¾ NPT



MIXING VALVE ASSEMBLY DETAIL

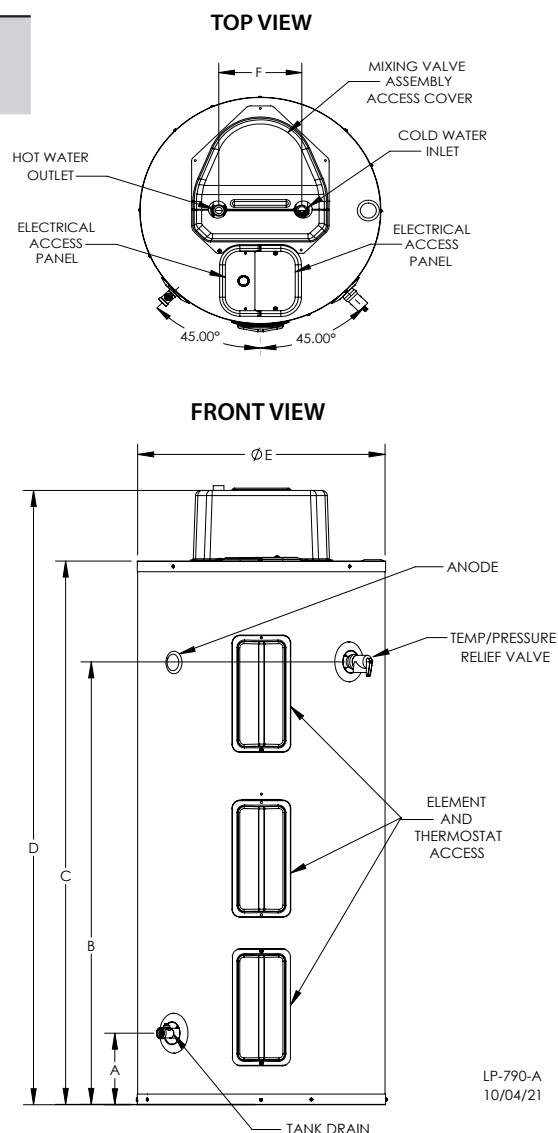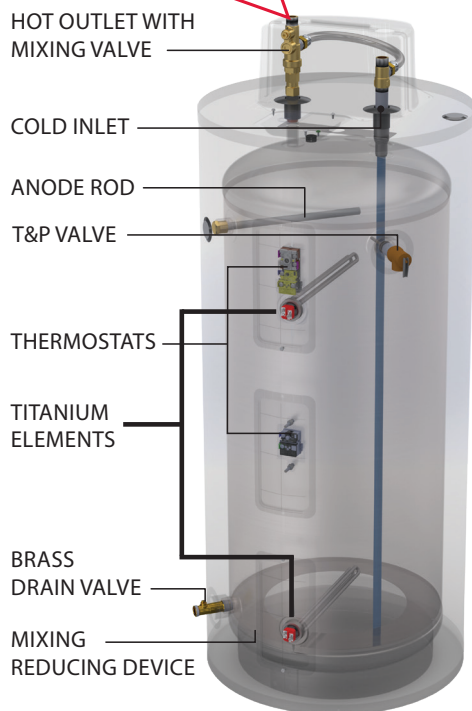

LP-790-A
10/04/21